

DPlus
AUTOMATION SYSTEMS

Bull

110/230/380 Vac

CATALOGO

Bull

110/230/380 Vac




CE


100% Produced in Italy



Bull es un motoreductor electromecánico para puertas corredizas con el reductor en baño de aceite. Gama de motores 2000kg monofásico y 2500kg trifásico

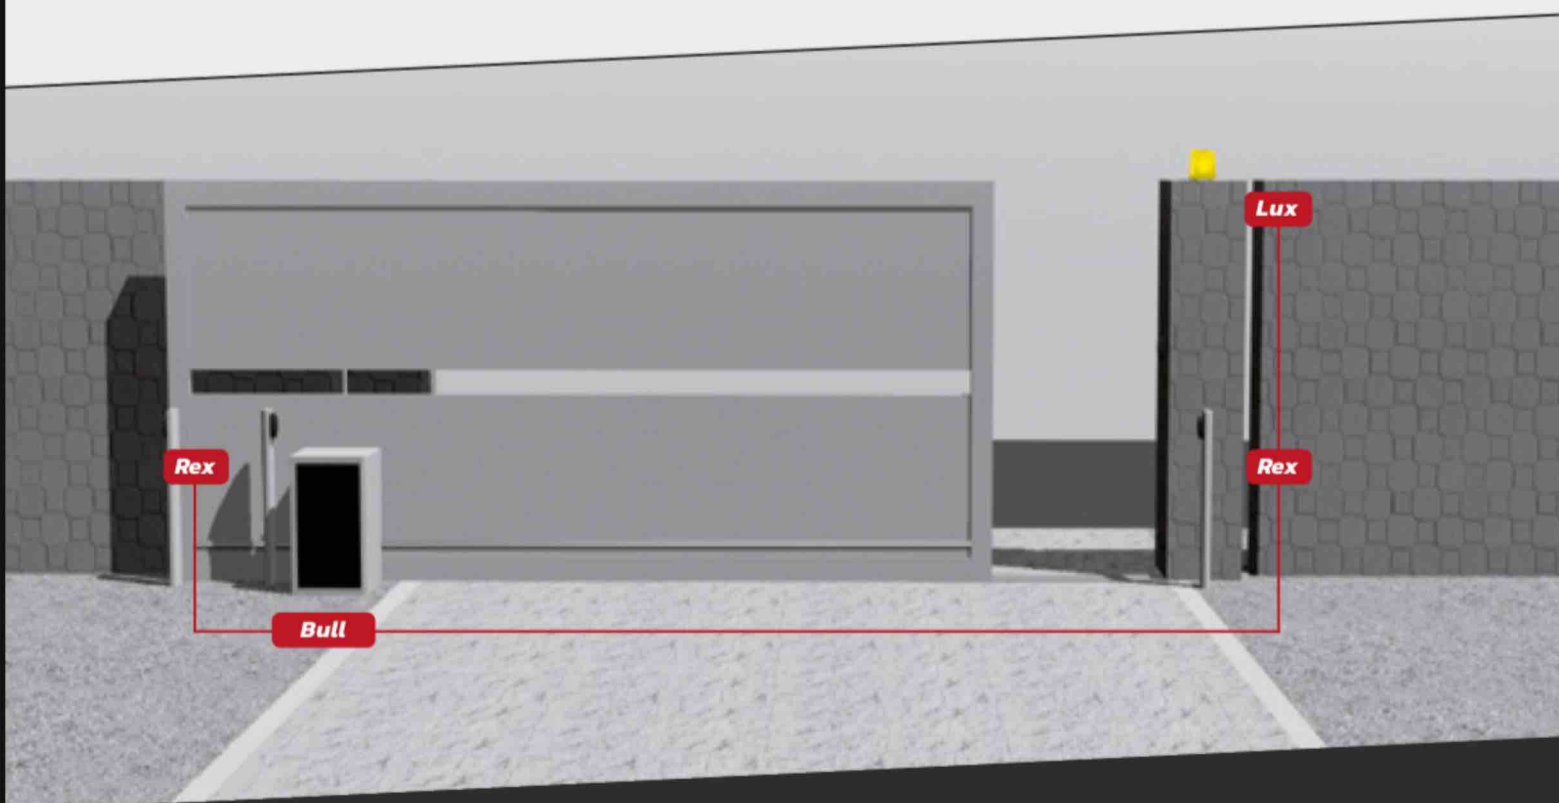

DATI TECNICI / TECHNICAL DATA	<i>Bull 230</i>	<i>Bull 110</i>	<i>Bull 380</i>
ALIMENTAZIONE / POWER SUPPLY	230 V 50/60 Hz	110 V 50/60 Hz	380 V 50/60 Hz
TEMPERATURA DI ESERCIZIO / OPERATING TEMPERATURE	-20° +55°	-20° +55°	-20° +55°
POTENZA MOTORE / POWER MOTOR	650 W	700 W	950 W
CONDENSATORE / CAPACITOR	25 µF	80 µF	-
PESO MASSIMO ANTA / MAX LEAF WEIGHT	2000 KG	2000 KG	2500 KG
GIRI MOTORE / ENGINE REVOLUTIONS	1400	1400	1400
PIGNONE / PINION	Mod4 Z16	Mod4 Z16	Mod4 Z16
VELOCITÀ APERTURA E CHIUSURA / OPENING TIME	9,6 M/MIN	9,6 M/MIN	9,6 M/MIN
PESO MOTORE / WEIGHT	20 KG	20 KG	20 KG
GRADO DI PROTEZIONE / PROTECTION'S DEGREE	IP44	IP44	IP44
LUBRIFICAZIONE / LUBRIFICATION	OIL	OIL	OIL
FREQUENZA UTILIZZO / FRÉQUENCE	INTENSIVE	INTENSIVE	INTENSIVE

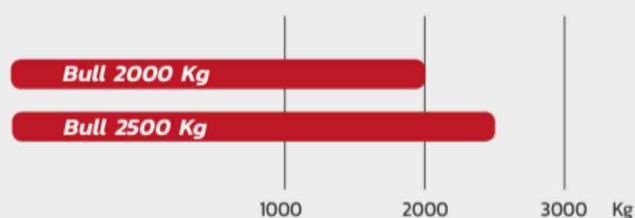

Peso máximo de las puertas por los motores de la gama ***Bull***



Bull 2500 Kg
380 Vac



Bull 2000 Kg
110-230 Vac

